






LAGERUNG / STORAGE / STOCKAGE /
ALMACENAMIENTO / OPSLAGRUIMTE



ACHTUNG! / ATTENTION! / ATTENTION! /
ATENCIÓN! / LET OP!



SICHERHEIT / SECURITY / SÉCURITÉ /
SEGURIDAD / VEILIGHEID

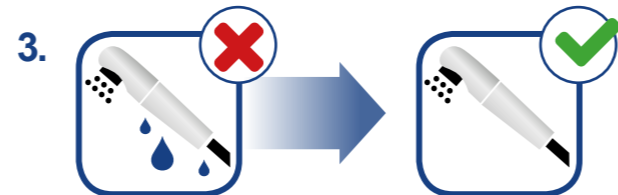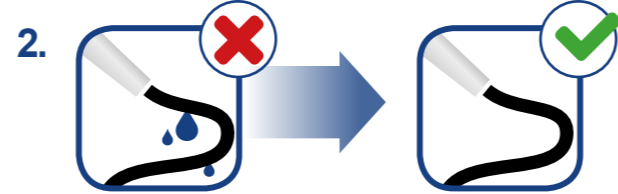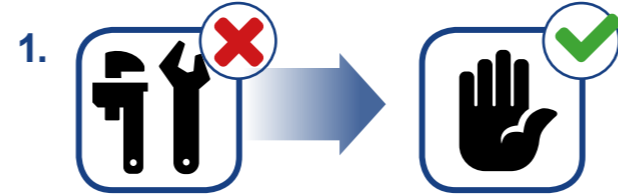

KONTAKT / CONTACT / CONTACT /
CONTACTO / CONTACT



Headquarters / Siège social principal / Hoofdkantoor / Sede central:

Aqua free GmbH

Wittenmoor 36

22525 Hamburg, Germany

E-Mail: info@aquafree.com

Phone: +49 (0)40-46 89 99 90

Fax: +49 (0)40-46 89 99 99

Aqua free Solutions Ltd.

The Media Centre

7 Northumberland Street

Huddersfield, HD1 1RL, Great Britain

E-Mail: info@aquafree.co.uk

Phone: +44 (0)1484 483045

Aqua free S.A.R.L.

4, rue Marconi

57070 Metz, France

E-Mail: info@aquafree.fr

Tél.: +33 (0)387 200230

Fax: +33 (0)387 204165

Aqua free Solución, S.L.

Avda. Alcalde Gómez Laguna 25

50009 Zaragoza, España

Correo electrónico: info@aquafree.es

Teléfono: +34 876 643 188

Aqua free B.V.

Luchthavenweg 81.231

5657 EA Eindhoven, Nederland

E-Mail: info@aquafree.nl

Telefoon: +31(0)40 305 00 92


Aqua free







Gebrauchsanweisung / Instruction for use /
Instructions d'utilisation / Instrucciones de uso /
Gebruiksaanwijzing

AS SHOWER / AS SHOWER chrome

Legionella
Protection

Geb_Artw_AS SHOWER_09/2017_V002

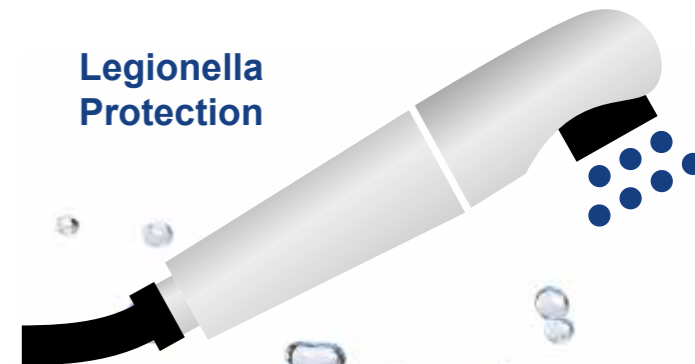

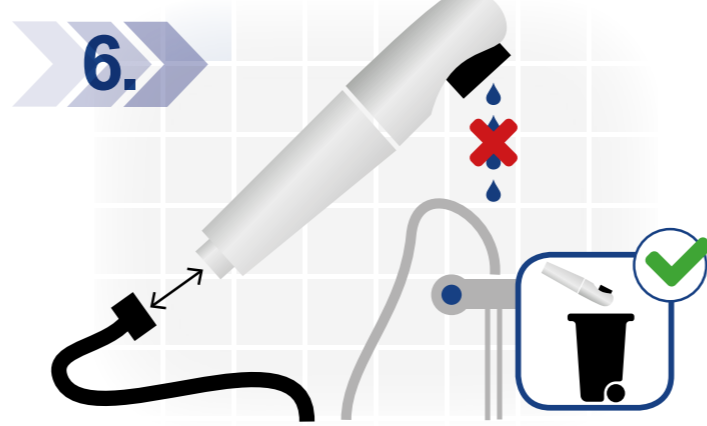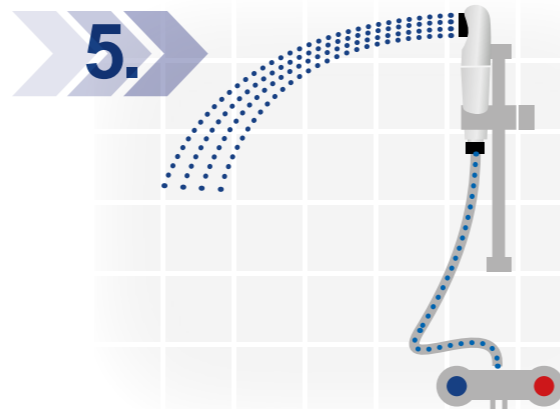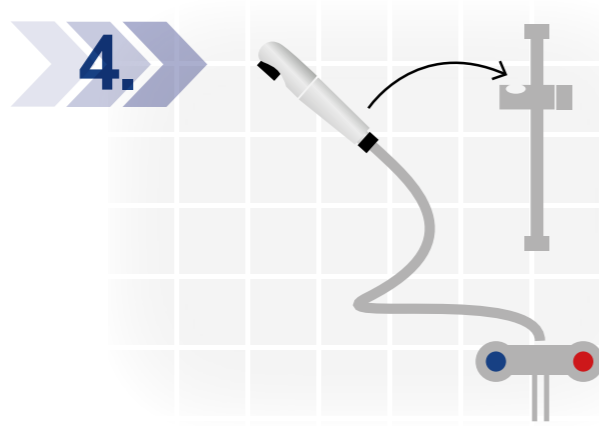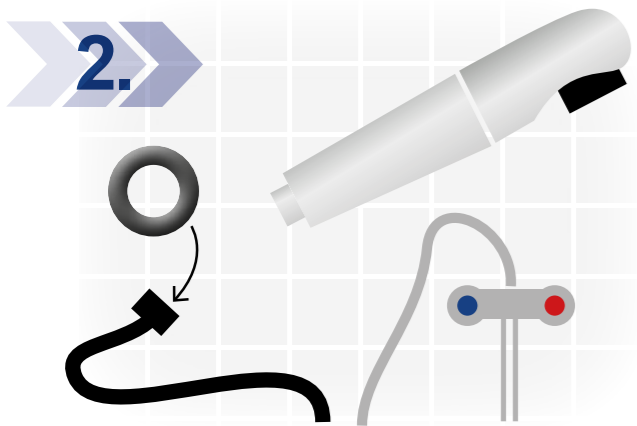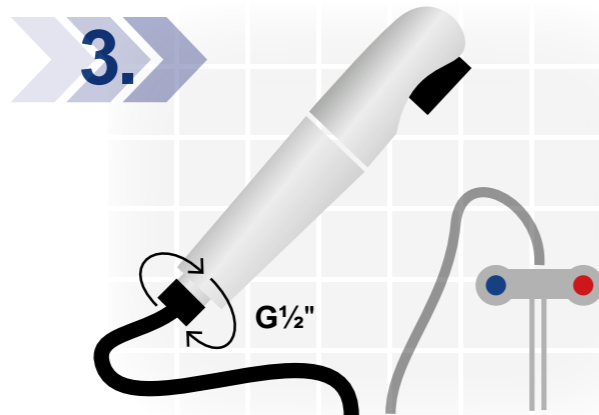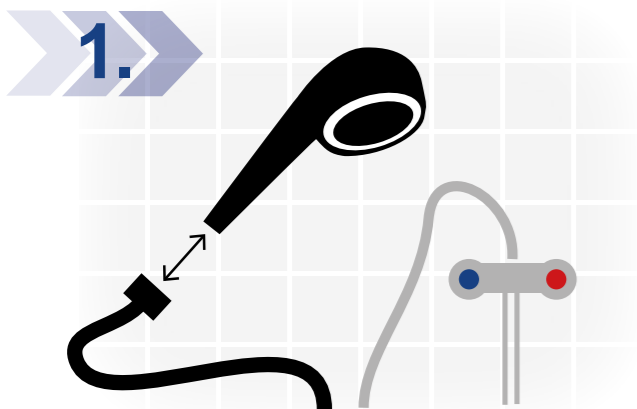

Abmessungen / size / dimensions / Dimensiones / Afmetingen	L 220 mm x Ø 44 mm
Legionellenrückhalt / Legionella retention / Rétention des Légionelles / Retención de Legionella / Retentie legionella	99,99999 %
Membran / membrane / membrane / membrana / membraan	Hohlfaser / hollow fiber / fibre creuse / fibra hueca / capillaire microfiltratie
Nutzungsdauer* / operating time* / durée d'utilisation* / Vida útil* / Levensduur*	max. 2 Monate (max. 62 Tage) / max. 2 months (max. 62 days) / max. 2 mois (max. 62 jours) / max. 2 mes (max. 62 dias) / max. 2 maand (max. 62 dagen)
Chlorbeständigkeit** / chlorine resistance** / résistance au chlore** / Resistencia al cloro** / Chloorbestendigheid**	≤ 10 ppm
Durchflussleistung / flow rate / débit / Rendimiento / Doorstroming	10 l/min (5 bar, 30°C)

Max. Betriebsdruck*** / max. operating pressure*** / pression de service maximale*** / Presión de servicio máxima*** / Maximale bedrijfsdruk***	5 bar
Max. Betriebstemperatur / max. operating temperature / max. température de fonctionnement / Temperatura de servicio máxima / Maximale Bedrijfstemperatuur	60°C (70°C ≤ 30 min. über die Nutzungsdauer / over the operating time / sur la durée d'utilisation / durante la vida útil / tijd levensduur)
Anschluss / Connection / Raccordement / Conector / Montage	G $\frac{1}{2}$ " Schraubgewinde / G $\frac{1}{2}$ " screw thread / G $\frac{1}{2}$ " filetage / G $\frac{1}{2}$ " rosca / G $\frac{1}{2}$ " schroefdraad

* Abhängig von der Wasserqualität /
Depending on water quality /
Suivant la qualité de l'eau /
Según la calidad del agua /
Afhankelijk van de waterkwaliteit.

** Kontinuierliche Zudosierung von ≤ 10 ppm über die Standzeit; kurzfristig (1h) hohe Dosierung (400.000 ppm) für chemische Desinfektion /
Continuous dosage of ≤ 10 ppm over operating time; short-term (1h) high dosage (400,000 ppm) for chemical disinfection /
Dosage continu de ≤ 10 ppm pendant la durée d'utilisation – dosage haut (1h) temporaire (400.000 ppm) pour la désinfection chimique /
Dosificación continua de ≤ 10 ppm durante la vida útil, ransitoriamente (1 h) dosis altas (400.000 ppm) para desinfección química /
Constante toevoer van ≤ 10 ppm tijdens de levensduur; kortdurende (1 h) hoge dosering (400.000 ppm) voor chemisch desinfectie.

*** Die AS SHOWER darf nicht an Niederdrucksysteme (z. B. Boiler) angeschlossen werden /
The AS SHOWER must not be connected to low pressure units (boiler) /
La AS SHOWER ne doit pas être raccordé à un réseau basse pression (chauffe-eau boiler) /
AS SHOWER no debe conectarse a sistemas de baja presión (p. ej., calentadores) /
De AS SHOWER mag niet op laagdruksystemen (zoals boilers) worden aangesloten