



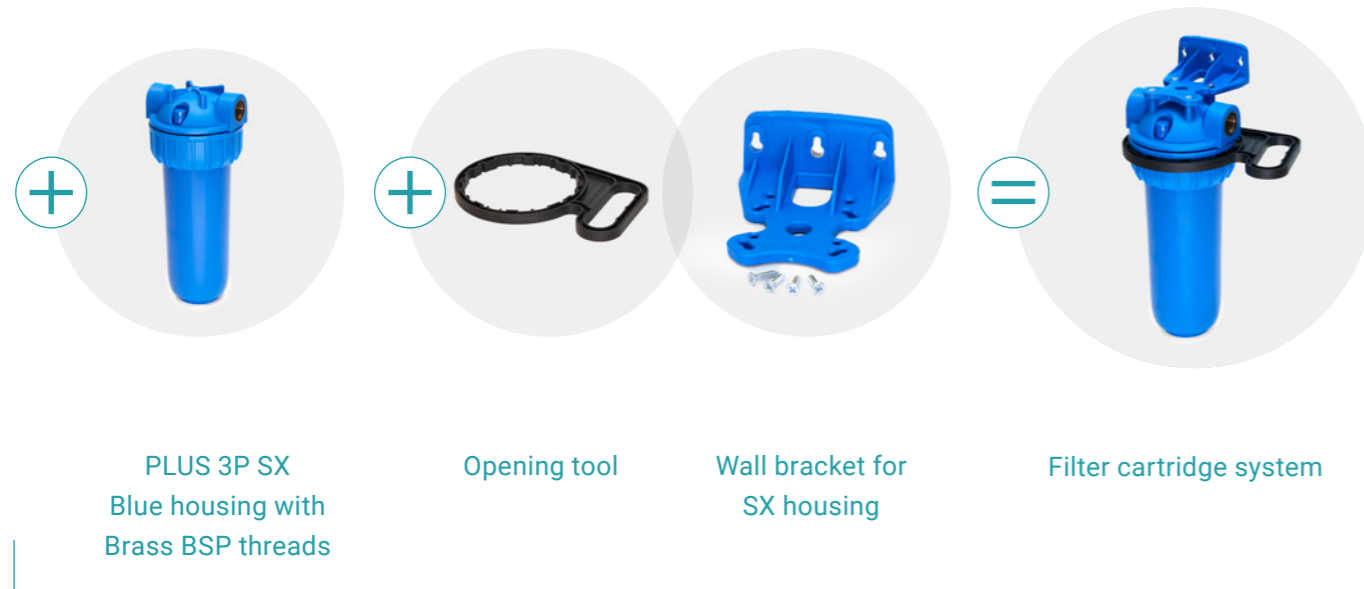

## Membrane filters in filter cartridge system

Optimal water hygiene for a wide range of applications  
– from water dispensers and ice makers to  
filtration systems in industry and medicine

## Suitable membrane filter cartridges for high flow rates

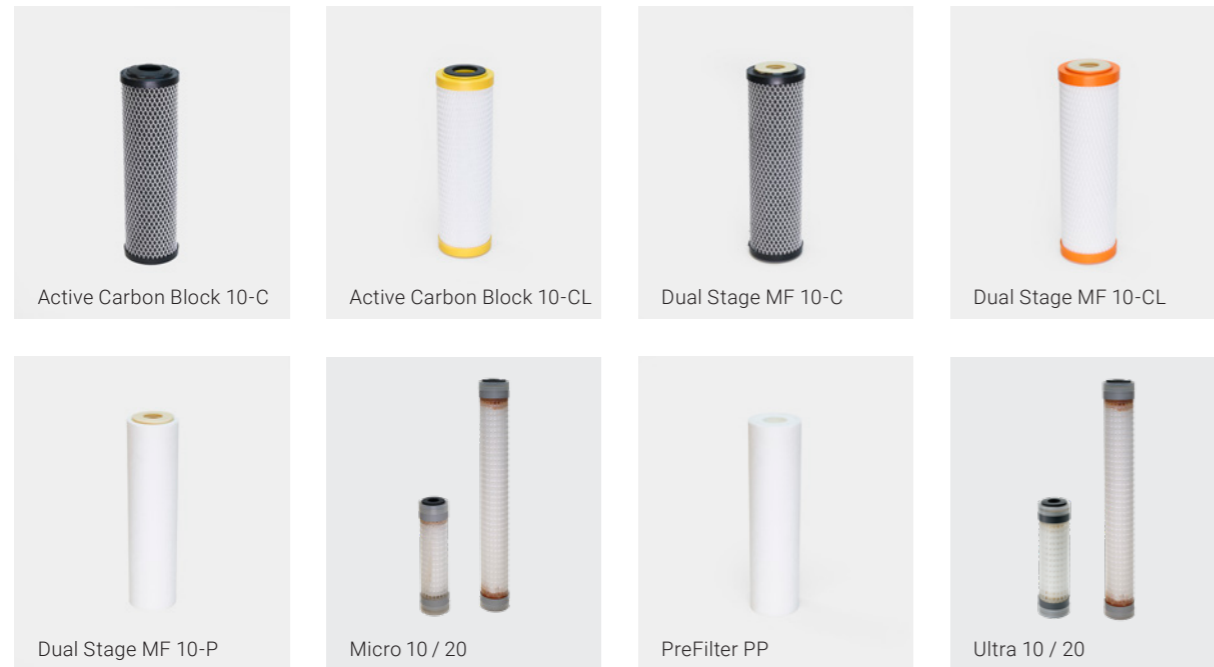

### Technical data Filter housing

#### Specifications

- Non-toxic materials, suitable for drinking water.
- Head and nut: reinforced polypropylene.
- Gasket: EPDM.
- Vent valve: polypropylene housing, EPDM seal.
- Inlet thread: CW 614 N brass.


#### Working pressure

- Maximum working pressure: 8 bar (116 psi)
- Maximum working temperature: 45 °C (113 °F)
- Minimum working temperature: 4 °C (39.2 °F)

		Artikelnr.	Bezeichnung
	<b>Activated carbon</b>	<b>501007</b>	Active Carbon Block 10 C
		<b>501016</b>	Active Carbon Block 10 CL
	<b>Activated carbon &amp; microfiltration</b>	<b>501006</b>	Dual Stage MF 10 C
		<b>501009</b>	Dual Stage MF 10 CL
	<b>Combination pre-filter &amp; microfiltration</b>	<b>501226</b>	Dual Stage MF 10 P
	<b>Microfiltration</b>	<b>501042 501379</b>	Micro 10 Micro 20
	<b>Pre-filtration</b>	<b>501041</b>	PreFilter PP
	<b>Ultrafiltration</b>	<b>501047 501398</b>	Ultra 10 Ultra 20

Item no.	Description	Connections	Dimensions mm A-B-C	Clamp length of the cartridge
<b>501428</b>	Filter housing SX 10", 3-piece, blue	½" BSP	315 – 133 – 130	248 (9 ¾")
<b>501600</b>	Filter housing SX 10", 3-piece, blue	1" BSP	321 – 145 – 130	248 (9 ¾")
<b>501608</b>	Filter housing SX 20", 3-piece, blue	1" BSP	571 – 145 – 130	506 (20")

### Further dimensions on request

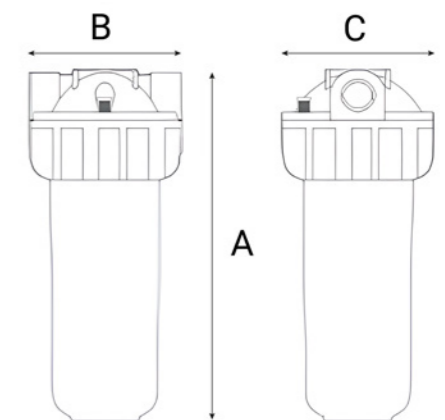



We are  
happy to  
advise you!

## Contact

**Aqua free Solutions Ltd.**

The Media Centre  
7 Northumberland Street  
Huddersfield, HD1 1RL  
Great Britain

T +44 1484 483045  
info@aqua-free.co.uk

Find out more:  
[aqua-free.com/en](http://aqua-free.com/en)

